


### Product Photos




Item	Specification
Clear-Span Width	6m / 8m / 10m / 12m
Eave Height	2.6m
Ridge Height	3.7m / 4.0m / 4.4m / 4.8m
Roof Pitch	20°
Bay Distance	5m
Longest Component	3.7m / 4.2m / 5.4m / 6.4m
Minimum Tent Length	10m
Roof Fixing	Bar Tensioning
Main Profile	120 x 68 x 3mm (4-channel)
Max Allowed Windspeed	80km/hr 0.3kn/m <sup>2</sup>
Eave Connection	Hot-dip galvanized steel insert
Framework Material	Hard pressed extruded aluminium 6061/T6 (13HW)
Cover Material	PVC-coated Polyester textile, flame retardant to DIN 4102 B1,M2. 750-900g/m <sup>2</sup>


### Technical Diagrams

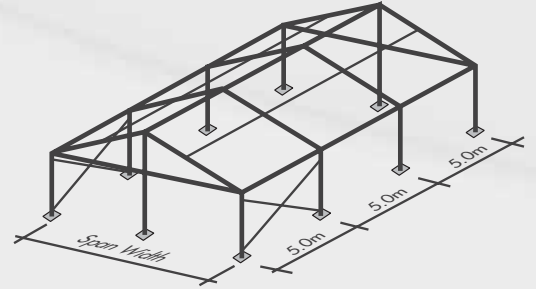


Type:  
WT6/260




Type:  
WT8/260



Type:  
WT10/260



Type:  
WT12/260

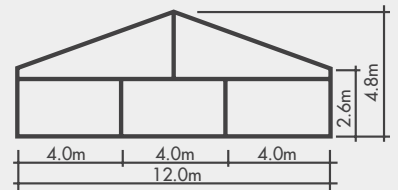

### Product Info

The Event Standard is the start for our professional 5m bay event range. The Event Standard offers popular clear-span widths of 6m, 8m 10 and 12m with an eave height 2.6m. The Event Tent series are available with a complete range of accessories including sidewalls with clear windows, roof lining glass wall & door systems ABS solid walling system & flooring system.

- Accessories:
- PVC window sidewalls
  - Anchoring
  - Rain gutter
  - Lining & curtains
  - Glass door units
  - Hard walling system
  - Glass walling system
  - Transparent PVC cover & sidewall
  - Flooring System
  - Weight plate

### Profiles

Framework Main profile dimensions and use

upright support	Ridge Purlin	Intermediate Purlin	Eave Tension Rail
roof beam	Eave Purlin		
gable pole	Gable Beam		